DCB MR-8 Modem Rack

DCB XR-8 Modem Rack

DESCRIPTION

This equipment is designed for high density packaging of DCB modems and multiplexers. The MR-8 modem rack will work with any LL or PL series modems and the DL DSU/CSU at rates from 4.8 to 56 Kbps. The XR-8 multiplexer rack works with any SPL, SR or SRX multiplexer. SPL rack cards from 2-6 channels occupy one of the eight slots available in the rack. SPL rack cards from 8-14 channels occupy two slots, SR and SRX 8/16 rack cards occupy one slot and SR and SRX 24/32 cards occupy two slots.

The DCB Rack is also suitable for use with:

DCB SecureDial 1-4 Channel
DCB SPL Hubs 2-10 Channel
DCB Access Switch
DCB Universal Switch

The DCB rack systems greatly simplifies wiring and test procedures as well as giving you a convenient place for spare equipment. The racks and power supplies are engineered to fit the standard 19" equipment cabinets.

FEATURES

- **MR-8 RACK HOLDS 8 LL OR PL MODEMS**
- **MR-8 RACK HOLDS 8 DL DSU/CSU**
- **XR-8 WORKS WITH ALL SPL, SR AND SRX MULTIPLEXERS**
- **PS-8 POWER SUPPLY FOR EITHER RACK**
- **XR-8 RACK HOLDS:**
    8 2-6 CHANNEL SPL MULTIPLEXERS
    4 8-14 CHANNEL SPL MULTIPLEXERS
    8 SR or SRX 8/16 MULTIPLEXERS
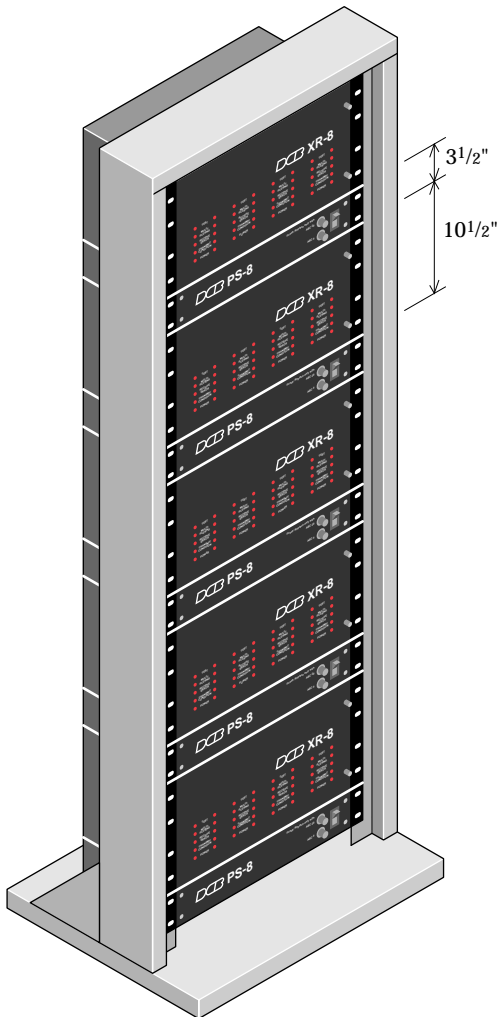   **4 SR or SRX 24/32 MULTIPLEXERS**

DCB PS-8 Rack Power Supply

Rear View of DCB PS-8

Sample rack: 640 async ports in 70" of rack spack

SPECIFICATIONS

Indicators
MR-8
   Power
   Transmit Data
   Receive Data
   Carrier Detect
   Request To Send
   Clear To Send
   Test
XR-8
   Power
   Transmit Condition
   Receive Error
   Multiplexing
   Test
PS-8
   Power

Physical/Electrical
MR-8 and XR-8
   19"w x 10^{1}/$_{2}$"h x 10"d
   120 VAC, 2.4 Amps, 275 Watts
PS-8
   19"w x 3^{1}/$_{2}$"h x 10"d
   120 VAC, 2.4 Amps, 275 Watts